

# THIN-R PLUS ENHANCED PIR INSULATION

## Partial Fill Cavity Walls

### XT/CWP (T&G)

Improved Lambda value  
of 0.021 W/mK\*

Tongue & groove jointing

Corner panels & cavity closers:  
Reduced thermal bridging

Clear cavity maintained



\*When compared to Unilin's standard products.



**THIN-R PLUS** ENHANCED  
PIR INSULATION

## Partial Fill Cavity Walls


## XT/CWP (T&amp;G)

**Partial Fill Cavity Wall Plus T&G** builds to a system thanks to its engineered tongue and grooved joints and pre-formed corners, ensuring insulation continuity and minimisation of thermal bridging.

Cavity Wall Plus (T&G) is a solution when building traditional masonry walls to the highest thermal standards whilst maintaining a residual cavity, offering protection from wind driven rain. The lower Lambda of 0.021 W/mK improves U-Values and meets Future Homes standards, proving a suitable choice for passive and low energy builds.

**Benefits**

- Improved Lambda value of 0.021 W/mK
- Tongue & groove jointing
- Corner panels & cavity closers: Reduced thermal bridging
- Clear cavity maintained
- No exposure restrictions

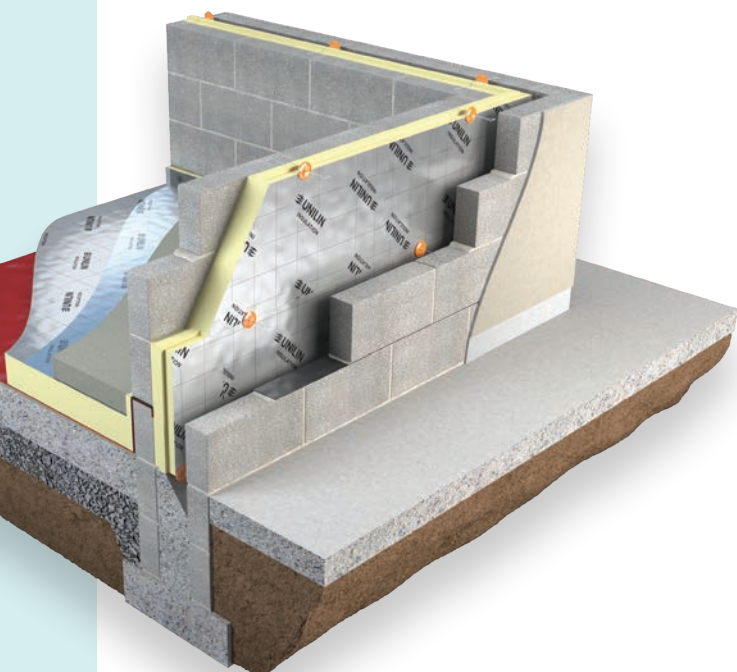**Specification Clause**

The partial fill cavity wall insulation shall be Thin-R Plus XT/CWP (T&G) manufactured to EN 13165:2012+A2:2016 by Unilin Insulation, comprising of a rigid Polyisocyanurate (PIR) core between composite foil facings. The Thin-R Plus XT/CWP (T&G) \_\_\_mm with an Agrément declared Lambda value of 0.021 W/mK to achieve a U-Value of \_\_\_W/m<sup>2</sup>K for the wall element. To be installed in accordance with instructions issued by Unilin Insulation.

An Environmental Product Declaration (EPD), certified by IGBC is available for this product. Please contact technical support for further details.



Refer to NBS clause F30 155, F30 12. Uniclass 25 71 63 66.

**Thermal Resistances**

Thickness (mm)	R-Value (m <sup>2</sup> K/W)
50	2.35
60	2.85
70	3.30
75	3.55
80	3.80
100	4.75


**Resistance 'R' Values**

The resistance value of any thickness of Unilin insulation can be ascertained by simply dividing the thickness of the material (in metres) by its Agrément declared Lambda value, for example: Lambda 0.021 W/mK and thickness 50mm -> 0.050/ 0.021 -> R-Value = 2.35. In accordance with EN 13165:2012+A2:2016, R-values should be rounded down to the nearest 0.05 (m<sup>2</sup>K/W).




## XT/CWP (T&G)

1. The Unilin Insulation Cavity Wall System includes an optional pre-formed corner panel that folds to 90 degrees to effectively insulate a junction that is normally vulnerable to thermal bridging and cold spots.

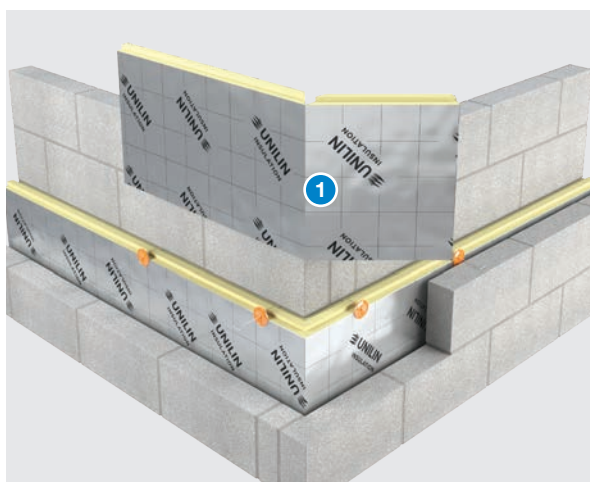


2. The Cavity Wall Plus tongue and groove jointing offers a practical on-site solution that results in a more continuous layer of insulation, minimising the threat of thermal bridging and improving the overall U-Value of the wall.

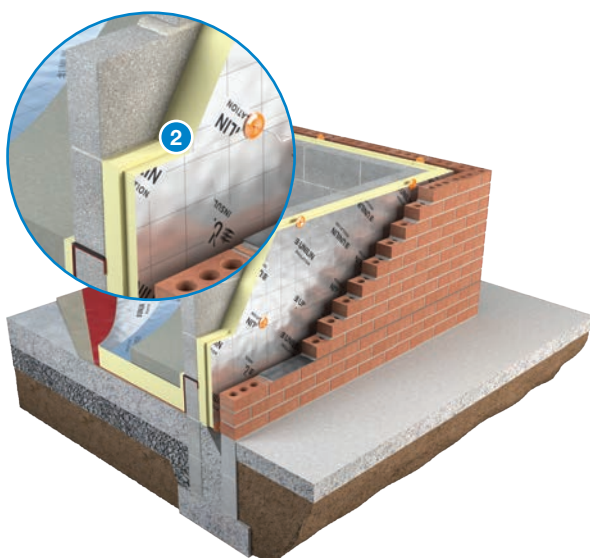

3. The composite foil facing on the boards improves the thermal performance of the wall. The residual cavity offers an effective method of preventing wind-driven rain penetrating a wall from the outside.

A residual cavity is the air space that remains when Cavity Wall Plus is placed against the inner leaf of the cavity of a wall. The recommended residual cavity width allowed is 50mm in accordance with Agrément certification.

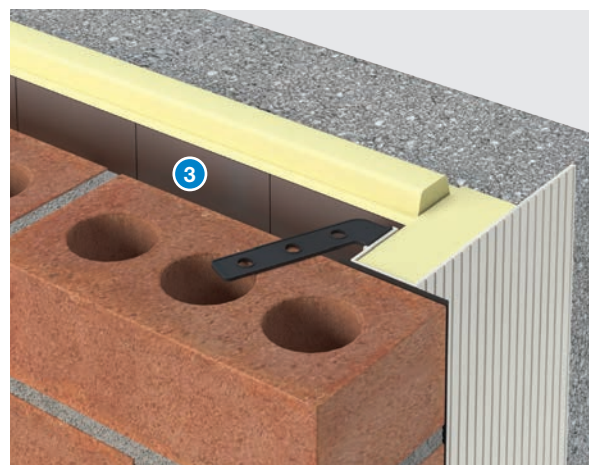

## XT/CWP (T&G)

Length (mm)	1200
Width (mm)	450
Thickness (mm)	50, 60, 70, 75, 80, 100

Other thicknesses may be available depending on minimum order quantity and lead time.

## Property & Units

Thermal Conductivity	0.021 (W/mK)
Compressive Strength	120 (kPa)
Reaction to Fire	Euroclass F

Unilin Declaration of Performance (DoP) for this product is available for download from our website.


# INSTALLATION GUIDELINES

## XT/CWP (T&G)

- Under Eurocode PD 6697:2019 Recommendations for the design of masonry structures to BS EN 1996-1-1:2022 and BS EN 1996-2:2024, it is recommended that no more than four courses of block are laid on the preceding skin before installation of the insulation. This allows for wall ties to be inserted accurately and without bending and thus distorting the physical characteristics of the wall ties. Ensure the wall is level and free of any protrusions before installing the insulation with all edges tightly interlocked.




- Mortar should be struck from the inner cavity face of the block to ensure mortar squeeze is minimised on the cavity side. The two courses of blockwork can then be built, ensuring the mortar is struck back from the cavity face to prevent mortar squeeze.
- Insert wall ties maximum 600mm centres one block course below DPC. Wall ties should incorporate retaining clips, be Agrément approved and conform to BS EN 845-1: 2013 + A1: 2016.

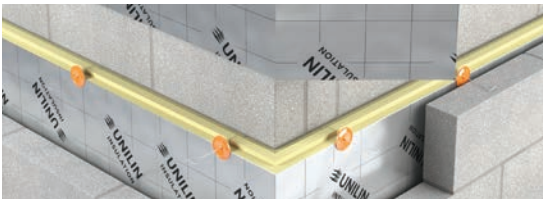

- Secure cavity boards tight against inner leaf with retaining clip on wall ties. Boards should be installed with the tongue uppermost and joints should be tightly butted.
- Ensure a minimum 150mm overlap with the floor insulation. The receiving block should be plumb to provide a flat surface to accept the insulation. As with setting out, installation should commence from adjacent corners using the Cavity Wall

Plus pre-formed corner boards. Alternate corner boards will achieve the offset break bonded pattern for the insulation.

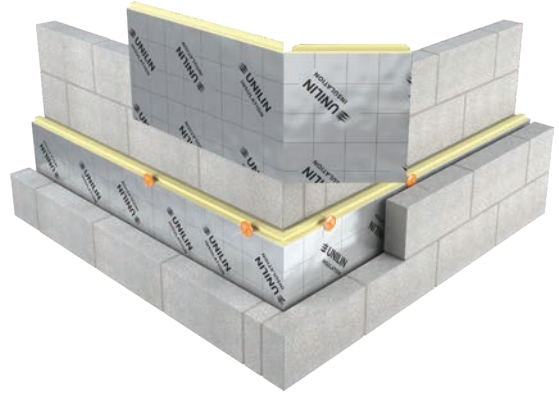

- Maintain a 50mm residual cavity to suit all exposure zones. In isolated circumstances, where the cavity is obstructed, a minimum 25mm residual cavity should always be maintained and extra consideration should be given to fixings and weatherproofing. Any reduction in cavity width should be agreed with Building Control.
- Place wall ties at maximum 900mm x 450mm centres, securing with a minimum of 3 wall ties per board.
- Ensure block joints are fully bonded with unbroken mortar. Fix wall ties 225mm vertically and 150mm horizontally from face of unbonded jambs. Ensure wall ties and cavity are kept clean of mortar. Wall ties should be sloped downwards towards outer leaf.
- A cavity board should be used to keep the cavity clean. Cavity Wall Plus corner boards and cavity closers may be fitted to improve detailing.
- Newly erected masonry should be protected to prevent the mortar being washed out of the joints by rain. Walls should be prevented from becoming saturated by covering the top of the wall with waterproof sheets; this is particularly important to minimise the incidence of efflorescence and lime bloom. When any working platform is not in use, the inner board should be turned away from the wall to prevent the splashing of the wall face.

# THERMAL PERFORMANCE

## XT/CWP (T&G)

### Typical U-Values



#### Table 1

U-Value calculations to EN ISO:6946 2017  
 XT/CWP (T&G)  
 Cavity Wall Partial Fill

#### Build up:

- Plasterboard on dabs
- 100mm Inner Leaf Blockwork
- XT/CWP (T&G)
- Low E Unventilated Cavity
- Brick

Wet plaster finish: increase insulation thickness by 5mm  
 Wall ties taken as S/S wire at 3 ties per m<sup>2</sup>

Thickness (mm)

	50mm	60mm	75mm	80mm	100mm
<b>0.11</b>	0.23	0.21	0.18	0.18	0.15
<b>0.15</b>	0.24	0.22	0.19	0.18	0.15
<b>0.46</b>	0.27	0.24	0.20	0.19	0.16
<b>1.13</b>	0.28	0.24	0.21	0.20	0.17

Block Lambda

# FABRIC ENERGY PERFORMANCE

## THE DIFFERENCE IS IN THE DETAIL

### XT/CWP (T&G)

#### Fabric Energy Efficiency is based on 3 main principles:

1. U-Values
2. Thermal Bridging
3. Air tightness

#### What is Thermal Bridging?

Thermal Bridging occurs in small areas where the insulation level is reduced significantly, compared with the remainder of the element. They may be 'Repeating,' 'Random,' or 'Non-Repeating.'

#### How is Thermal Bridging measured?

Thermal bridges are calculated as a linear thermal transmittance value - Psi ( $\Psi$ ) measured in W/mK. SAP is the software programme used to calculate a dwelling's energy rating. Within this software, Thermal Bridging through junctions is accounted for as a 'Y-Value.'

## Thermal Bridging & Airtightness

A comparison between the Y-Value and a hole in the construction



**Y= 0.20**

The equivalent of an open 'Garage Door' 2.1m x 3.3m (6.93m<sup>2</sup>) opening.



**Y= 0.08**

The equivalent of an open 'Patio Door' 2.1m x 1.8m (3.78m<sup>2</sup>) opening.



**Y= 0.03**

The equivalent of an open 'Window' 1.25m x 1.25m (1.56m<sup>2</sup>) opening

Our range of insulation products deliver the U-Value requirements to meet Passive standards and building regulations, but it's not just about U-Values any longer.


How the system builds, how it interconnects at junctions and how it is witnessed and confirmed on site is equally as important.

## XT/CWP (T&G)

To achieve good detailing, Accredited Construction Details (ACDs) should be followed during the planning, design and build process.

## Unilin Psi Values Using Accredited Details

Accredited Details	Block Type	75mm Psi ( $\psi$ )	100mm Psi ( $\psi$ )	Unilin Certificate Reference
E2 (MCI-WD-02) - Lintel	Dense 1.13	0.024	0.027	UI-CWP-E2-WD-02 V1
E2 (MCI-WD-02) - Lintel	Med 0.31	0.024	0.027	UI-CWP-E2-WD-02 V1
E2 (MCI-WD-02) - Lintel	Light 0.15	0.025	0.028	UI-CWP-E2-WD-02 V1
E3 (MCI-WD-04) - Sill	Dense 1.13	0.021	0.024	UI-CWP-E3-WD-04 V1
E3 (MCI-WD-04) - Sill	Med 0.31	0.021	0.024	UI-CWP-E3-WD-04 V1
E3 (MCI-WD-04) - Sill	Light 0.15	0.022	0.025	UI-CWP-E3-WD-04 V1
E4 (MCI-WD-06) - Jamb	Dense 1.13	0.001	0.000	UI-CWP-E4-WD-06 V1
E4 (MCI-WD-06) - Jamb	Med 0.31	0.001	0.000	UI-CWP-E4-WD-06 V1
E4 (MCI-WD-06) - Jamb	Light 0.15	0.001	0.001	UI-CWP-E4-WD-06 V1
E5 (MCI-GF-01) - Floor/Wall	Dense 1.13	0.166	0.168	UI-CWP-E5-GF-01 V1
E5 (MCI-GF-01) - Floor/Wall	Med 0.31	0.079	0.078	UI-CWP-E5-GF-01 V1
E5 (MCI-GF-01) - Floor/Wall	Light 0.15	0.058	0.058	UI-CWP-E5-GF-01 V1
E16 - External corner	Dense 1.13	0.055	0.047	UI-CWP-E16-EXT-CRN V1
E16 - External corner	Med 0.31	0.048	0.042	UI-CWP-E16-EXT-CRN V1
E16 - External corner	Light 0.15	0.044	0.039	UI-CWP-E16-EXT-CRN V1

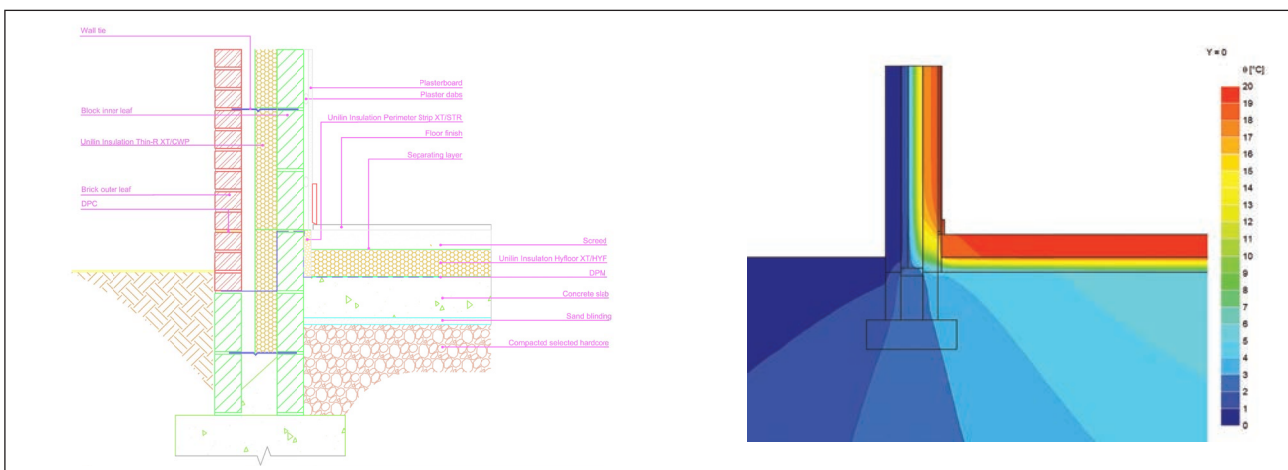

For further information on this topic: Unilin has published Thermal Bridging guidance, request your copy from our technical department. Further certificates are also available for download from our website.

Unilin has an extensive library of downloads available on our website. These include ACDs, BIM files, CAD drawings and Agrément certificates. We also offer CPD training on Thermal Bridging as well as a wide variety of building regulation topics.

[Visit unilininsulation.co.uk](http://unilininsulation.co.uk)



## HANDLING, CUTTING & STORAGE

Unilin insulation should be stored off the ground, on a clean, flat surface and must be stored under cover. The polythene wrapping is not considered adequate protection for outside exposure. Care should be taken to protect the insulation in storage and during the build process.

The insulation boards can be readily cut using a sharp knife or fine toothed saw. Ensure tight fitting of the insulation boards to achieve continuity of insulation as asked for within the ACDs. Appropriate PPE should be worn when handling insulation. Please refer to Health & Safety data sheets on our website.

The boards are wrapped in polythene packs and each pack is labelled with details of grade/type, size and number of pieces per pack.

### Durability

Unilin Insulation products are stable, rot proof, provide no food value to vermin and will remain effective for the lifetime of the building, depending on specification and installation. Care should be taken to avoid contact with acids, petrol, alkalis and mineral oil. When contact is made, clean materials in a safe manner before installation.





# Expect more Knowledge

Unilin Insulation is one of the UK's largest manufacturers and suppliers of insulation. We have a 20-plus year history of working in partnership with construction professionals to close the gap between design and as-built performance.

Higher standards of fabric performance call for greater adherence to best practice detailing. To achieve this and to 'close the gap' between design and build, we provide a dedicated Technical Team, all qualified to the highest standards of competency in U-Value calculation and condensation risk analysis.

#### Here to support you

- BRE listed Thermal Bridging Detailing
- BRE Trained Modelling
- BBA/TIMSA calculation competent
- Warranted Calculations available
- Immediate technical response
- SAP Qualified
- Insulation systems to deliver real onsite performance

#### Get in touch

T: +44 (0) 371 222 1055 E: [tech.ui@unilin.com](mailto:tech.ui@unilin.com) [unilininsulation.co.uk](http://unilininsulation.co.uk)



**FREE**  
One-to-one  
advice



**Unilin Insulation UK Ltd**  
Park Road, Holmewood  
Chesterfield, Derbyshire  
United Kingdom  
S42 5UY

**t.** +44 (0) 371 222 1033  
**e.** info.ui@unilin.com

**unilininsulation.co.uk**



**ISO 45001:2023+A1:2024** Occupational Health & Safety Management Systems  
**ISO 9001:2015+A1:2024** Quality Management Systems  
**ISO 14001:2015+A1:2024** Environmental Management Systems

### **The Sustainable Solution**

Specifying Unilin Insulation is a real commitment to minimising energy consumption, harmful CO<sub>2</sub> emissions and their impact on the environment. Using our products is one of the most effective ways to reduce energy consumption - in fact, after just eight months the energy they save far outweighs the energy used in their production. In addition, our manufacturing facilities operate to an ISO 14001:2015+A1:2024 certified Environmental Management System.

### **Environmental Product Declaration (EPD)**

An Environmental Product Declaration or EPD for a construction product indicates a transparent and credible step in the pursuit and achievement of real sustainability in practice, it is a public declaration of the environmental impacts associated with specified life cycle stages of that product. Unilin EPDs have been independently verified in accordance with EN 15804+A2:2019 and ISO 14025:2010 accounting for stages of the LCA from A1 to A3, with options A4-A5 and modules C1-C4 and D included. The process of creating an EPD allows us to improve performance and reduce resource wastage through improvements in product design and manufacturing efficiency. They play a crucial role in manufacturing and construction and are increasingly asked for by industry.

### **EPDs and BREEAM**

BREEAM is primarily trying to encourage designers to take EPDs into consideration when specifying products. BREEAM requires EPDs to be verified by a third-party. For the Mat O2 category, points are awarded based on whether EPDs are generic, manufacturer-specific, or product-specific. Non 3rd party verified EPDs to EN 15804:2012+A2:2019 cannot be accepted. All of Unilin EPDs are externally verified.

### **Responsible Sourcing**

Unilin has BES 6001 certification for responsible sourcing. The second BREEAM credit under that category is based on responsibly-sourced materials - at least 80% of the total insulation used in roofs, walls, ground floors and services must meet any of tier levels 1 to 6 in the BREEAM table of certification schemes. Our Environmental Management System is certified under EN ISO 14001:2015+A1:2024, and our raw materials come from companies with similarly certified EMS (copies of all certificates are available for BREEAM assessments). This level of responsible sourcing meets tier level 6 in the BREEAM table.

Good workmanship and appropriate site procedures are necessary to achieve expected thermal and airtightness performance. Installation should be undertaken by professional tradespersons. The example calculations are indicative only, for specific U-Value calculations contact Unilin Insulation Technical Support. Unilin technical literature, Agrément certifications and Declarations of Performance are available for download on the Unilin Insulation website. The information contained in this publication is, to the best of our knowledge, true and accurate at the time of publication but any recommendations or suggestions which may be made are without guarantee since the conditions of use are beyond our control. Updated resources may be available on our websites. All images and content within this publication remain the property of Unilin Insulation.