

ACCESSORIES

CAVITY
CLOSER

Cavity Closer

CLOSE-R


Saves time

Cost effective

Suits 100 - 150mm cavities

Meets updated building
regulations requirements

Available from
builder merchants

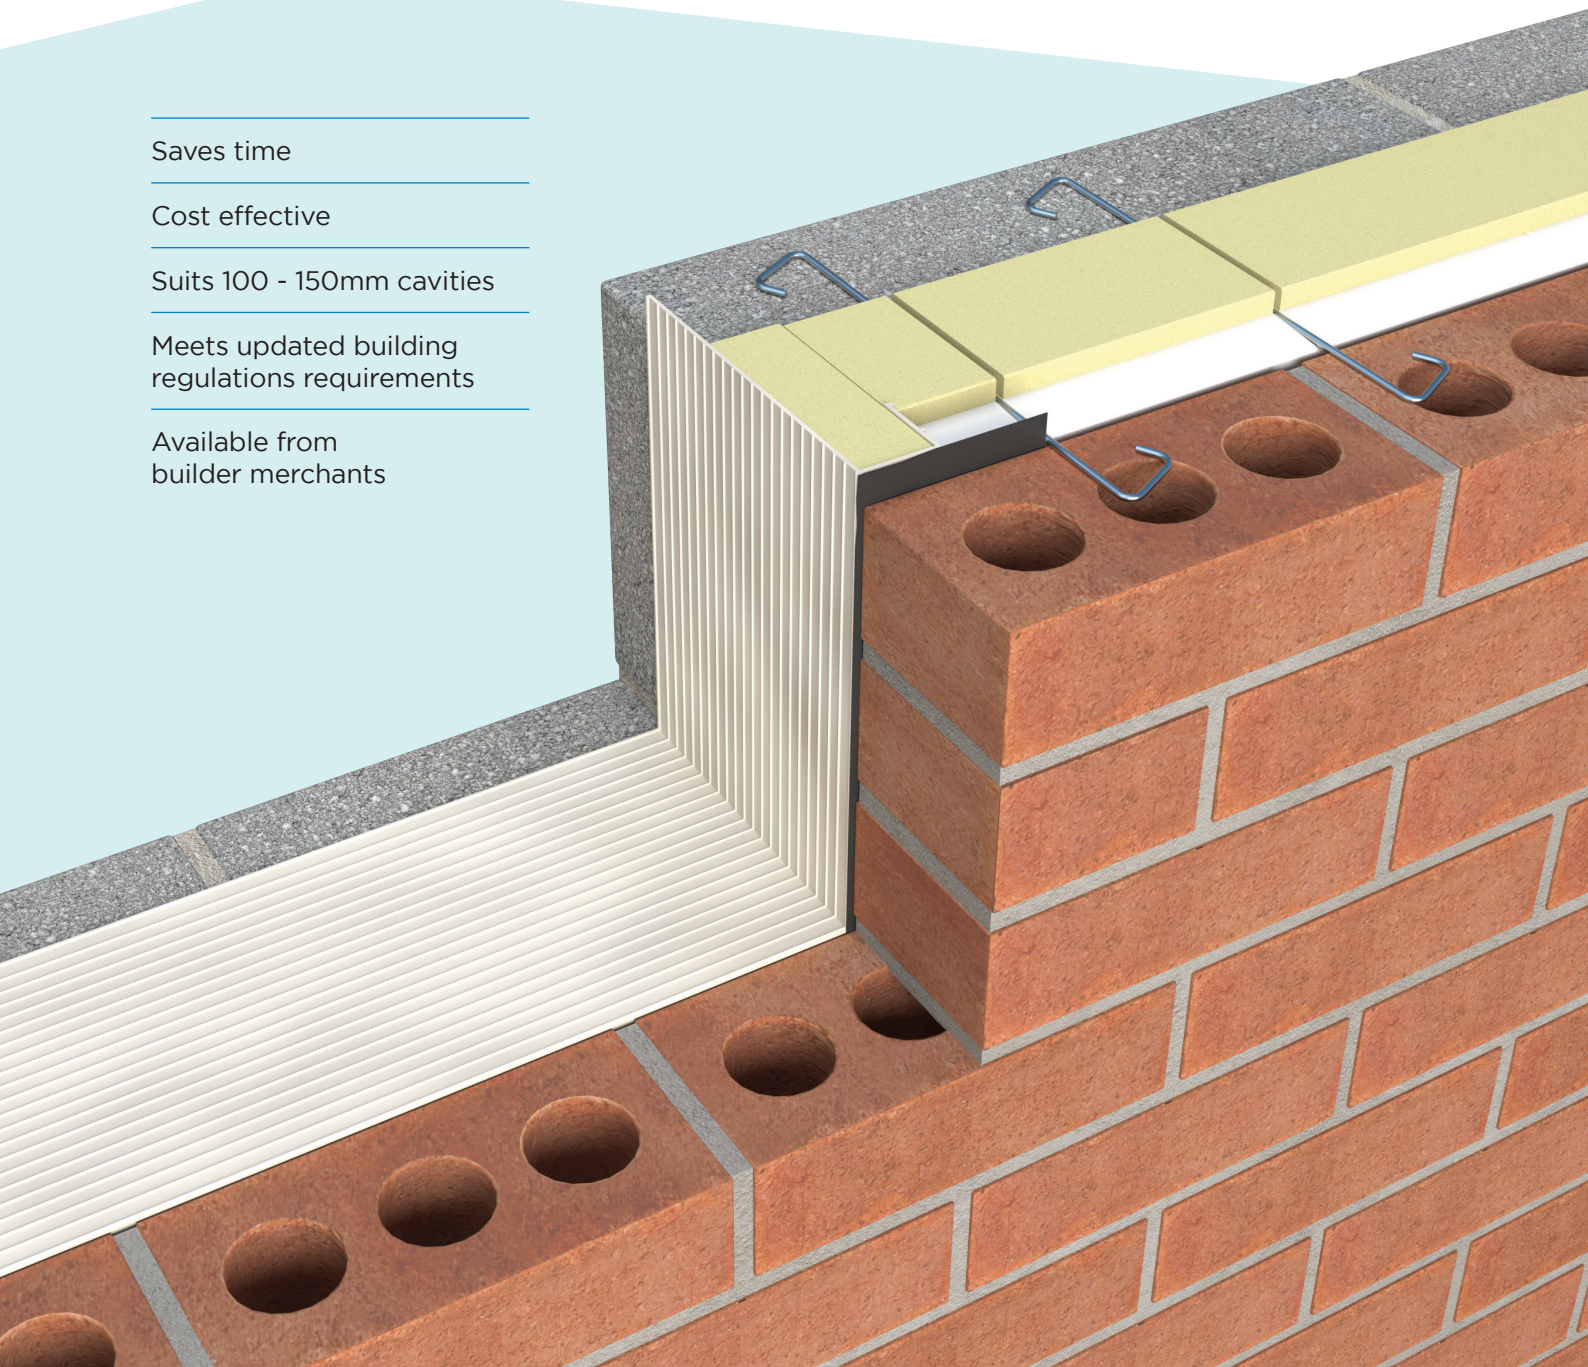

CLOSE-R

Insulated Cavity Closer


CLOSE-R

Unilin Close-R fully insulated cavity closers are a cost effective solution for builders and specifiers for the closing of cavities around window and door openings, preventing cold bridging, damp penetration, air infiltration and condensation.

The Close-R range is used to close cavities and is suited to all types of windows and doors and is available in sizes to fit cavity widths from 100mm - 150mm, with checked detail to suit brick or drylined specifications and flanged detail to suit block outer facings. (Flanged detailing requires precise construction tolerances).

Benefits

- Saves Time
- Cost effective
- Suits 100 - 150mm cavities
- Meets new updated building regulations requirements
- Available from Builder Merchants

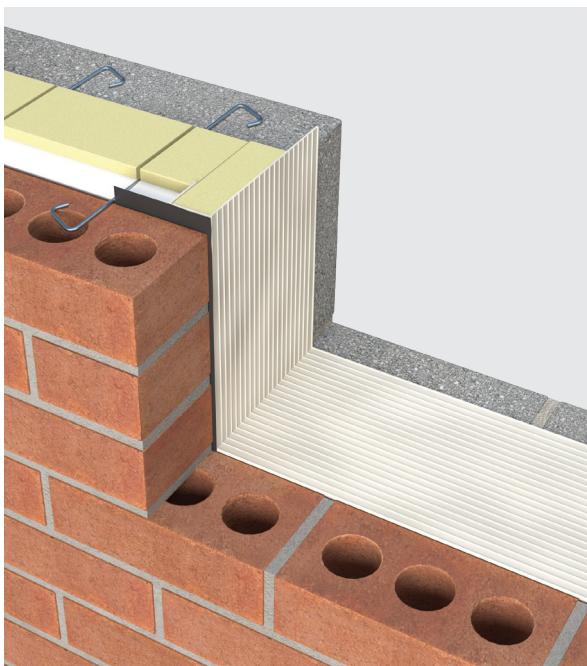


Building Regulations

The recently revised Building Regulations place great emphasis on detailing at junctions. It has recognised the need to improve traditional junction performance as wall U-Values improve.

Targets for junction thermal performance are set in the BRE Paper IP1/06 and asks that a value of 0.05 be achieved. In the past where a typical wall U-Value was between 0.37 and 0.27, the 0.05 target was easily achieved using the traditional 25mm strip at the reveal. However when pushing the wall U-Values to 'A or B' rated values the junctions actually fail IP1/06.

Unilin Close-R has been independently tested to exceed the new standards.

Thermographic measurement - Best Practice with liner

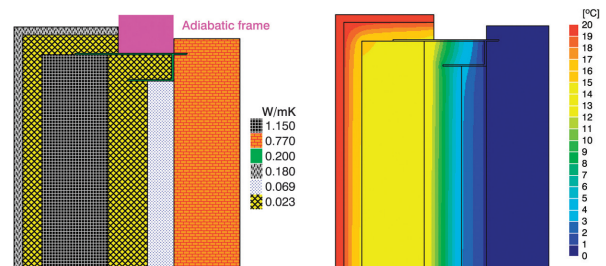

INSTALLATION GUIDELINES

CLOSE-R


If precise fitting of windows can not be guaranteed, a checked reveal using a vertical DPC should be used.

Any jointing of Close-R should be facilitated within 150mm of the opening head. Close-R should be extending by 50mm past the sill closer.

When sills are horned into the facing outer leaf, the reveal Close-R should be trimmed around the concrete sill and extend 50mm into the cavity.

Horizontal DPCs should be used with the sill as normal, with a lining of 40mm Polyiso placed at the back of the concrete sill.

Should clarification be required, contact Unilin Technical Support prior to installation.

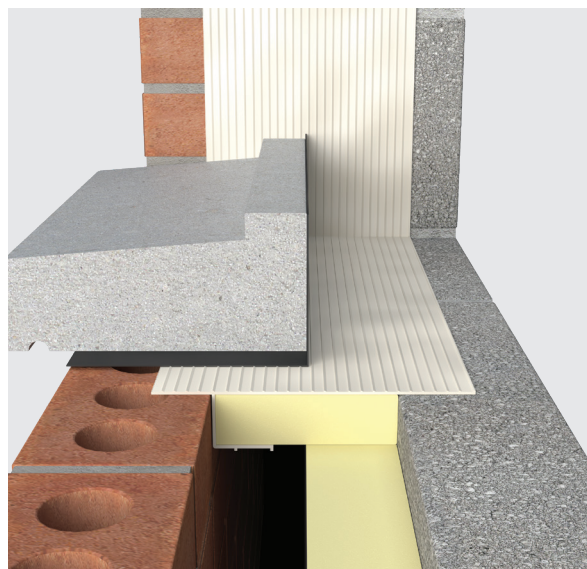

XT/CW (T&G) Partial Fill

Wall U-Value	XT/CW (T&G)	Thermal Liner	IP1/06 Psi Target	Measured Psi-value
0.25	50mm	-	0.05	0.022
0.20	75mm	-	0.05	0.026
0.16	100mm	-	0.05	0.029
0.20	50mm	37.5mm	0.05	0.012

CT/PIR Built-In Full Fill

Wall U-Value	CT/PIR	Thermal Liner	IP1/06 Psi Target	Measured Psi-value
0.18	100mm	-	0.05	0.019
0.15	125mm	-	0.05	0.022
0.12	150mm	-	0.05	0.024

INSTALLATION GUIDELINES

CLOSE-R

Flanged fit - Concrete Outer


This method requires precise construction to facilitate accurate window fitting against Close-R.

Length	Cavity Width	XT/CW (T&G) Thickness
2400mm	100mm	50mm
2400mm	125mm	75mm
2400mm	150mm	100mm




Checked fit - Brick Outer

Length	Cavity Width	XT/CW (T&G) Thickness
2400mm	100mm	50mm
2400mm	125mm	75mm
2400mm	150mm	100mm

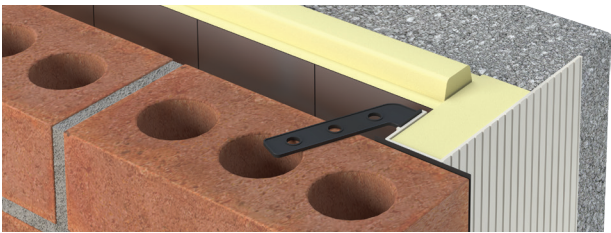


Checked fit - Plus Thermal Liner (Enhanced Accredited Detail)

Length	Cavity Width	XT/CW (T&G) Thickness
2400mm	100mm	50mm

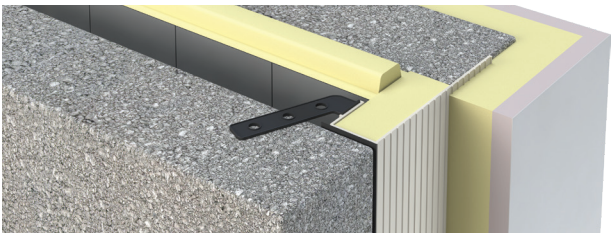

Checked fit - CavityTherm Built-in Full Fill

Length	Cavity Width	CavityTherm Thickness
2400mm	100mm	Max 100mm
2400mm	110mm	Max 110mm
2400mm	125mm	Max 125mm
2400mm	150mm	Max 150mm

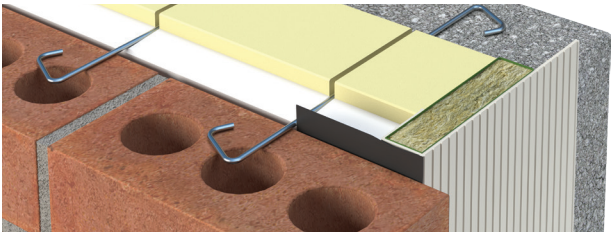

CLOSE-R


Unilin Close-R (FR) - fire rated cavity closers

The Unilin Close-R (FR) Fire rated closer by Dacatie, comprises a PVC-U outer profile with encapsulated insulation. It forms a continuous fire rated insulated cavity closer providing a minimum 30 minutes integrity and is covered by BBA Certificate 98/3474.



Checked fit - Brick Outer


Length	Cavity Width	XT/CW (T&G) Thickness
2400mm	100mm	50mm
2400mm	125	75mm
2400mm	150	100mm

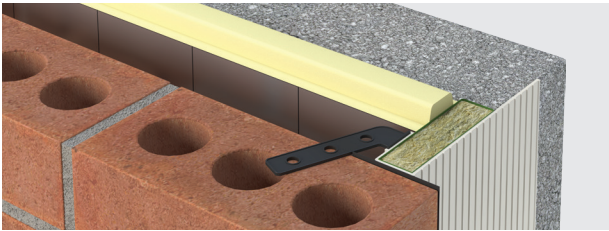

Checked fit - Plus Thermal Liner (Enhanced Accredited Detail)

Length	Cavity Width	XT/CW (T&G) Thickness
2400mm	100mm	50mm

*Available subject to minimum order quantity and lead times

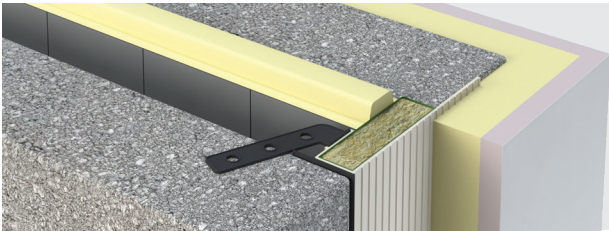

HANDLING, CUTTING & STORAGE

Unilin insulation should be stored off the ground, on a clean, flat surface and must be stored under cover. The polythene wrapping is not considered adequate protection for outside exposure. Care should be taken to protect the insulation in storage and during the build process.

The insulation boards can be readily cut using a sharp knife or fine toothed saw. Ensure tight fitting of the insulation boards to achieve continuity of insulation as asked for within the ACDs. Appropriate PPE should be worn when handling insulation. Please refer to Health & Safety data sheets on our website.

The boards are wrapped in polythene packs and each pack is labelled with details of grade/type, size and number of pieces per pack.

Durability

Unilin Insulation products are stable, rot proof, provide no food value to vermin and will remain effective for the lifetime of the building, depending on specification and installation. Care should be taken to avoid contact with acids, petrol, alkalis and mineral oil. When contact is made, clean materials in a safe manner before installation.





Expect more Knowledge

Unilin Insulation, formerly Xtratherm, is one of the UK's largest manufacturers and suppliers of insulation. We have a 20-plus year history of working in partnership with construction professionals to close the gap between design and as-built performance.

Higher standards of fabric performance call for greater adherence to best practice detailing. To achieve this and to 'close the gap' between design and build, we provide a dedicated Technical Team, all qualified to the highest standards of competency in U-Value calculation and condensation risk analysis.

Here to support you

- BRE listed Thermal Bridging Detailing
- BRE Trained Modelling
- BBA/TIMSA calculation competent
- Warranted Calculations available
- Immediate technical response
- SAP Qualified
- Insulation systems to deliver real onsite performance

Get in touch

T: +44 (0) 371 222 1055 E: info.ui@unilin.com unilininsulation.co.uk

FREE
One-to-one
advice



Unilin Insulation UK Ltd

Park Road, Holmewood
Chesterfield, Derbyshire
United Kingdom
S42 5UY

t. +44 (0) 371 222 1033

e. info.ui@unilin.com

unilininsulation.co.uk

The Sustainable Solution

Specifying Unilin Insulation is a real commitment to minimising energy consumption, harmful CO₂ emissions and their impact on the environment. Using our products is one of the most effective ways to reduce energy consumption – in fact, after just eight months the energy they save far outweighs the energy used in their production. In addition, our manufacturing facilities operate to an ISO 14001 certified Environmental Management System.

Environmental Product Declaration (EPD)

An Environmental Product Declaration or EPD for a construction product indicates a transparent, robust and credible step in the pursuit and achievement of real sustainability in practice, it is a public declaration of the environmental impacts associated with specified life cycle stages of that product. Unilin EPDs have been independently verified in accordance with EN 15804+A2:2019 and ISO 14025 accounting for stages of the LCA from A1 to A3, with options A4-A5 and modules C1-C4 and D included. The process of creating an EPD allows us to improve performance and reduce resource wastage through improvements in product design and manufacturing efficiency. They play a crucial role in manufacturing and construction and are increasingly asked for by industry.

EPDs and BREEAM

BREEAM is primarily trying to encourage designers to take EPDs into consideration when specifying products. BREEAM requires EPDs to be verified by a third-party. For the Mat 02 category, points are awarded based on whether EPDs are generic, manufacturer-specific, or product-specific. Non 3rd party verified EPDs to EN 15804 cannot be accepted. All of Unilin EPDs are externally verified.

Responsible Sourcing

Unilin has BES 6001 certification for responsible sourcing. The second BREEAM credit under that category is based on responsibly-sourced materials – at least 80% of the total insulation used in roofs, walls, ground floors and services must meet any of tier levels 1 to 6 in the BREEAM table of certification schemes. Our Environmental Management System is certified under EN ISO 14001, and our raw materials come from companies with similarly certified EMS (copies of all certificates are available for BREEAM assessments). This level of responsible sourcing meets tier level 6 in the BREEAM table.

Good workmanship and appropriate site procedures are necessary to achieve expected thermal and airtightness performance. Installation should be undertaken by professional tradespersons. The example calculations are indicative only, for specific U-Value calculations contact Unilin Insulation Technical Support. Unilin technical literature, Agrément certifications and Declarations of Performance are available for download on the Unilin Insulation website. The information contained in this publication is, to the best of our knowledge, true and accurate at the time of publication but any recommendations or suggestions which may be made are without guarantee since the conditions of use are beyond our control. Updated resources may be available on our websites. All images and content within this publication remain the property of Unilin Insulation.



ISO 45001 Occupational Health & Safety Management Systems

ISO 9001 Quality Management Systems

ISO 14001 Environmental Management Systems